


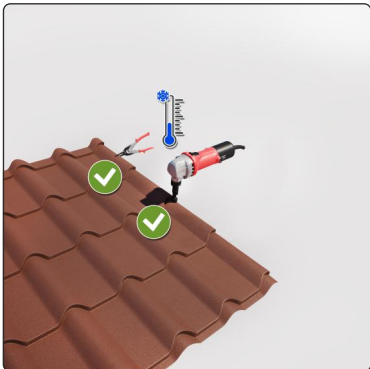
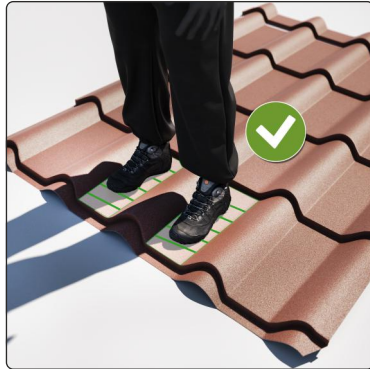


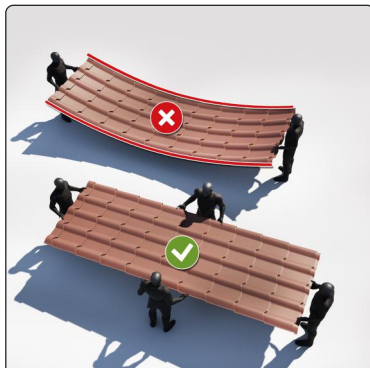

STEPPING ON THE ASSEMBLED METAL ROOF IS ALLOWED ONLY ON THE AREAS BETWEEN THE CORRUGATED PARTS OF THE METAL PANEL.

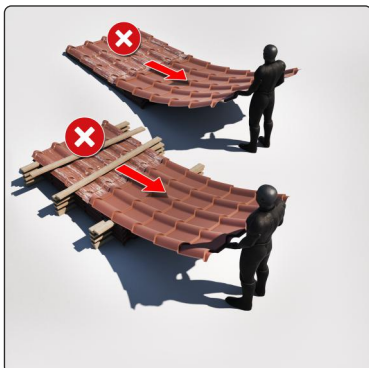

METAL ROOFING PANELS MUST BE CUT EXCLUSIVELY WITH POWER SHEARS. THE USE OF POWER GRINDERS IS FORBIDDEN.

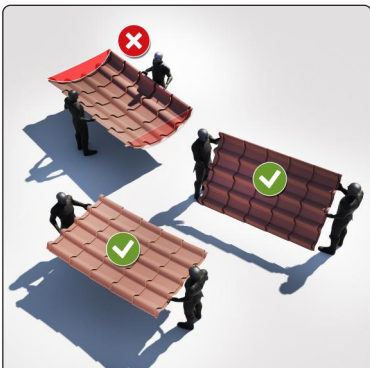

STORAGE:

1. Horizontally, on pallets, protected against moisture.
 2. **AWAY FROM** heat sources and corrosive materials.
 3. Avoid contact with wet cement, acids, mortar, lime, earth, copper, other aggressive materials or fluids, etc.
 4. Pallet stacking must consider the weight of each pallet in turn. Avoid placing the base of the upper pallet on the pressed area of the product stored in the pallet below.
 5. The storage period must not exceed **45 days**. It is required to store the panels indoors, removed from the package and placed on a wooden bed/support, with sufficient space between them for a proper ventilation.
- * **ZINK-COATED METAL SHEETS** must be stored indoors, in a dry and ventilated area, removed from the package and placed on a wooden bed/support, with sufficient space between them for a proper ventilation. The storage period must not exceed **10 days**.

 **BILKA**[®]
• roof system • rain system •



radioactive materials



acids



liquids and moisture

Please refer to the installation guide:
www.bilka.ro/en/documentation-en

follow us on:



www.bilka.com

SHIPPING AND HANDLING:

1. For the manual handling of the metal roofing panels, the panels must be held from the edges so as to prevent their deformation.
2. Products **MUST NOT** be moved by dragging. The panels must be handled vertically, by at least 2 persons.

WARNING:

Failing to observe the cutting, transport, handling and storage rules will result in the loss of the product warranty.