



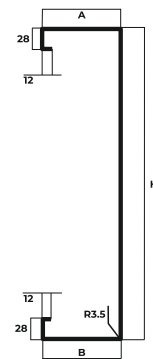

**PRODUCT**

**ZINC-COATED  
C PLUS  
PROFILE**

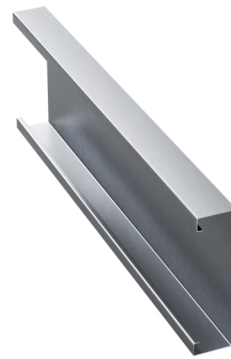

C PLUS metal profiles are an innovation in the field of metal structures for light industrial halls. C PLUS profiles are mainly used as ledges for walls or as tie pieces for the roof, but also for secondary structures.

The rigidity and strength of the profiles allow them to be used for:

- structural steel elements for civil, industrial and agricultural construction work;
- secondary elements of the resistance structures of buildings as roof panels or wall trusses;

TECHNICAL CHARACTERISTICS	Section height	200 - 400 mm
	Thickness	1.5 - 3.5 mm
	Material quality	S350GD+Z275
	Standard cutting lengths	250-15000 mm * for other lengths please contact BILKA technical dep.

- C PLUS profiles may be pierced according to the drilling plan made by the engineer. Piercing may be carried out on all sides, as well as on the profile feet;
- the profiles have resistances higher than the standard C profile, due to the geometric characteristics of the raw section;
- the profiles may have equal or unequal sides;
- all the connections of the structural elements are with screws, ensuring a quick and easy assembly.

Perforation patterns	Perforation type	Available diameter									
		5	10	11	12	13	14	15	16	18	20
ROUND		5 22	10	11	12	13	14	15	16	18	20
OVAL		18x14 40x26	20x10 50x13	25x14 50x5	28x14	32x16	35x12	39x19	40x18	40x25	
SQUARE		40x40									
RECTANGULAR		16x24	28.5x18								
MULTIPLE COMBINATIONS											

PROFILE TYPE	Sectional dimensions								
	H (mm)	A(mm)	B(mm)	D1=D2 (mm)	C1=C2 (mm)	t (mm)	t <sub>n</sub> (mm)	r (mm)	G(kg/ml)
C+200-1.5	200	70	70	12	28.0	1.46	1.5	3.5	4.70
C+200-2	200	70	70	12	28.0	1.96	2.0	3.5	6.19
C+200-2.5	200	70	70	12	28.0	2.46	2.5	3.5	7.63
C+200-3	200	70	70	12	28.0	2.96	3.0	3.5	9.02
C+200-3.5	200	70	70	12	28.0	3.46	3.5	3.5	10.39
C+250-1.5	250	80	80	12	28.0	1.46	1.5	3.5	5.52
C+250-2	250	80	80	12	28.0	1.96	2.0	3.5	7.28
C+250-2.5	250	80	80	12	28.0	2.46	2.5	3.5	9.01
C+250-3	250	80	80	12	28.0	2.96	3.0	3.5	10.67
C+250-3.5	250	80	80	12	28.0	3.46	3.5	3.5	12.31
C+300-1.5	300	90	90	12	28.0	1.46	1.5	3.5	6.36
C+300-2	300	90	90	12	28.0	1.96	2.0	3.5	8.38
C+300-2.5	300	90	90	12	28.0	2.46	2.5	3.5	10.38
C+300-3	300	90	90	12	28.0	2.96	3.0	3.5	12.32
C+300-3.5	300	90	90	12	28.0	3.46	3.5	3.5	14.23
C+350-1.5	350	100	100	12	28.0	1.46	1.5	3.5	7.17
C+350-2	350	100	100	12	28.0	1.96	2.0	3.5	9.48
C+350-2.5	350	100	100	12	28.0	2.46	2.5	3.5	11.76
C+350-3	350	100	100	12	28.0	2.96	3.0	3.5	13.97
C+350-3.5	350	100	100	12	28.0	3.46	3.5	3.5	16.16
C+400-1.5	400	100	100	12	28.0	1.46	1.5	3.5	7.76
C+400-2	400	100	100	12	28.0	1.96	2.0	3.5	10.27
C+400-2.5	400	100	100	12	28.0	2.46	2.5	3.5	12.74
C+400-3	400	100	100	12	28.0	2.96	3.0	3.5	15.14
C+400-3.5	400	100	100	12	28.0	3.46	3.5	3.5	17.53

## Geometric characteristics of the raw section

PROFILE TYPE	Geometric characteristics of the raw section									
	A (mm <sup>2</sup> )	y <sub>c</sub> (mm)	z <sub>c1</sub> (mm)	z <sub>c2</sub> (mm)	I <sub>y</sub> (cm <sup>4</sup> )	W <sub>y1</sub> (cm <sup>3</sup> )	W <sub>y2</sub> (cm <sup>3</sup> )	I <sub>z</sub> (cm <sup>4</sup> )	i <sub>y</sub> (cm)	i <sub>z</sub> (cm)
C+200-1.5	582.5	23.1	99.3	99.3	363.49	36.62	36.62	46.32	7.78	2.75
C+200-2	772.2	22.7	99.0	99.0	477.56	48.24	48.24	59.07	7.76	2.72
C+200-2.5	956.9	22.4	98.8	98.8	587.93	59.54	59.54	71.65	7.73	2.70
C+200-3	1133.7	22.0	98.5	98.5	694.81	70.54	70.54	83.41	7.71	2.67
C+200-3.5	1307.9	21.6	98.3	98.3	798.62	81.28	81.28	94.19	7.69	2.64
C+250-1.5	684.7	24.2	124.3	124.3	663.50	53.40	53.40	67.15	9.70	3.08
C+250-2	909.4	23.9	124.0	124.0	873.64	70.45	70.45	87.64	9.67	3.05
C+250-2.5	1129.1	23.5	123.8	123.8	1077.34	87.06	87.06	105.94	9.65	3.03
C+250-3	1340.9	23.1	123.5	123.5	1276.41	103.35	103.35	123.93	9.63	3.00
C+250-3.5	1550.1	22.9	123.3	123.3	1469.72	119.25	119.25	140.97	9.59	2.96
C+300-1.5	786.9	25.4	149.3	149.3	1098.65	73.61	73.61	93.78	11.59	3.40
C+300-2	1046.6	25.1	149.0	149.0	1435.25	96.33	96.33	121.65	11.57	3.37
C+300-2.5	1301.3	24.7	148.8	148.8	1774.82	119.32	119.32	148.90	11.54	3.34
C+300-3	1548.1	24.4	148.5	148.5	2103.85	141.67	141.67	173.95	11.51	3.31
C+300-3.5	1792.3	24.0	148.3	148.3	2425.37	163.60	163.60	197.15	11.48	3.27
C+350-1.5	889.1	26.7	174.3	174.3	1661.49	95.35	95.35	125.84	13.47	3.71
C+350-2	1183.8	26.3	174.0	174.0	2191.36	125.94	125.94	163.87	13.44	3.67
C+350-2.5	1473.5	26.0	173.8	173.8	2711.61	156.06	156.06	200.48	13.41	3.64
C+350-3	1755.3	25.6	173.5	173.5	3218.76	185.52	185.52	234.51	13.38	3.61
C+350-3.5	2034.5	25.3	173.3	173.3	3715.64	214.47	214.47	266.34	13.35	3.58
C+400-1.5	962.1	24.7	199.3	199.3	2280.42	114.45	114.45	130.64	15.17	3.63
C+400-2	1281.8	24.3	199.0	199.0	3010.85	151.30	151.30	170.62	15.14	3.60
C+400-2.5	1596.5	24.0	198.8	198.8	3725.42	187.44	187.44	207.94	15.11	3.57
C+400-3	1903.3	23.7	198.5	198.5	4426.62	223.00	223.00	243.16	15.08	3.54
C+400-3.5	2207.5	23.5	198.3	198.3	5111.96	257.85	257.85	277.35	15.05	3.51

PROFILE TYPE	Resistances according to the raw section	
	Stretching N (kN)	Bending M (kNm)
C+200-1.5	203.89	12.82
C+200-2	270.28	16.88
C+200-2.5	334.93	20.84
C+200-3	396.79	24.69
C+200-3.5	457.76	28.45
C+250-1.5	239.66	18.69
C+250-2	318.30	24.66
C+250-2.5	395.20	30.47
C+250-3	469.31	36.17
C+250-3.5	542.53	41.74
C+300-1.5	275.43	25.76
C+300-2	366.32	33.71
C+300-2.5	455.47	41.76
C+300-3	541.82	49.59
C+300-3.5	627.30	57.26
C+350-1.5	311.20	33.37
C+350-2	414.34	44.08
C+350-2.5	515.74	54.62
C+350-3	614.35	64.93
C+350-3.5	712.07	75.06
C+400-1.5	336.75	40.06
C+400-2	448.64	52.95
C+400-2.5	558.79	65.60
C+400-3	666.15	78.05
C+400-3.5	772.62	90.25