



CLASIC

The CLASIC metal tile is profiled in steel with thickness between 0.40 and 0.60 mm, zinc-coated (Z225-Z275), covered with a layer of glossy or dull type paint.


This type of metal roofing is the most widely used, similar with classical tiles and is used especially in residential buildings.

The CLASIC metal tile is produced in a wide range of colors.

Metal roofing panels are available in lengths between 500 mm and 7000 mm.

For long waterline lengths, where covering with a single tile panel is not recommended, two or more metal roofing panels must be used.

This provides calculation of the bottom panels as a multiple of tiles, taking into account the technical overlap of 150 mm.

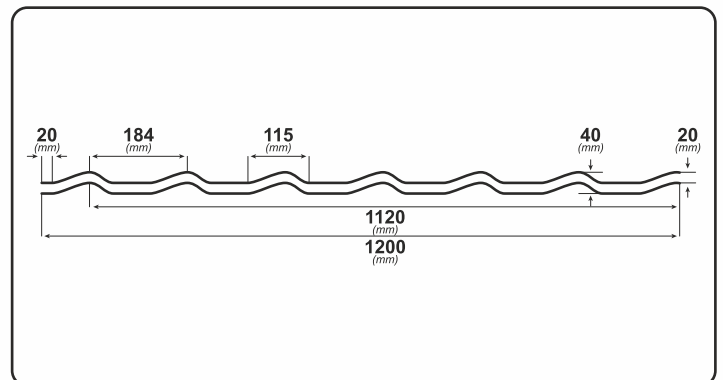

TECHNICAL CHARACTERISTICS	Material	Steel sheet, galvanized on both sides, protected with polyester
	Rated thickness	0,4 mm - 0,6 mm
	Total width	1200 mm
	Effective coverage width	1120 mm
	Module length	350 / 400 mm
	Total height	40 mm
	Weight per unit area	3 - 5 kg / sqm
	Minimum slope	8° if no diagonal joints are necessary/ 14° in the case of diagonal joints
	Glossy finish warranty	10-year warranty for color characteristics and corrosion
	Matte finish warranty	15-year warranty for color characteristics and corrosion
	GrandeMat finish warranty	30-year warranty for color characteristics and corrosion
Expected lifespan	60 years for the roof, resistance to temperature changes	

