




## CORRUGATED STEEL SHEET T12

Corrugated steel sheet T12 is made of steel sheet, galvanized on both sides and protected with polyester

### WHERE TO USE:

- Partitioning spaces for constructions, production, warehousing, agricultural buildings etc.;
- Delimitation of covered opened construction spaces (shelters, warehouses, terraces, summer shelters for animals etc.);
- Decorating the interior and exterior ceiling surfaces and interior surfaces of construction elements;
- Decorating the exterior surfaces of fences, household annexes, temporary constructions.

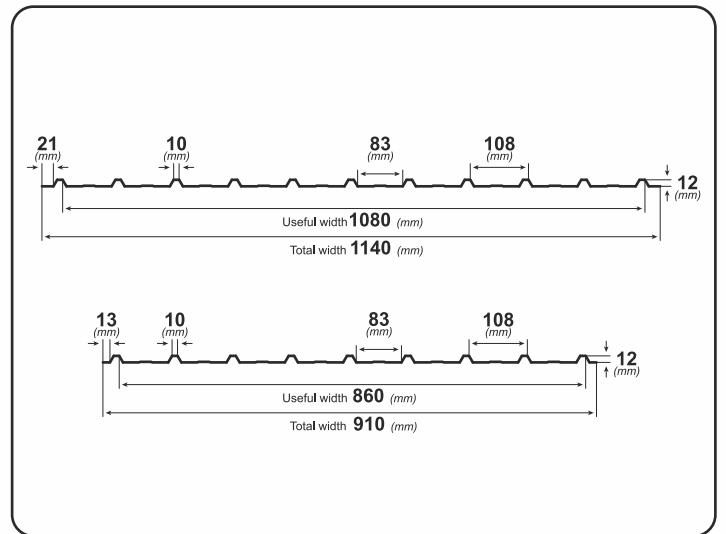

### PRODUCTION SPECIFICATIONS

- BILKA T12 corrugated steel sheet is made with a nominal thickness between 0.3–0.4 mm, based on the construction requirements. The standard length of the modules ranges from 0.500 m to 13.5 m. Execution of the modules with different lengths from the standard ones will be made after prior consultation with the technical specialist from BILKA.
- The corrugated steel sheet is profiled in two options: from raw material with a width of 1250 mm and from raw material with a width of 1000 mm.

TECHNICAL CHARACTERISTICS	Material	Steel galvanized sheet metal on both sides protected with polyester
	Nominal thickness	0,3 mm - 0,4 mm
	Total width	1140 mm   910 mm
	Covering useful width	1080 mm   860 mm
	Height of the corrugation	12 mm
	Weight on the surface	2 - 4 kg / sqm
	Warranty for glossy finishing 0,40 mm	5-year warranty for color characteristics and corrosion
	Useful life	60 years, resistance to temperature variations