



CORRUGATED STEEL SHEET T18


T18 corrugated steel sheet is manufactured in steel sheet, galvanized on both sides and protected with polyester. It is used especially on facades, fences or ceilings but can be mounted on the roof as covering.

DATA SHEET | CORRUGATED STEEL SHEET T18

DATA SHEET | CORRUGATED STEEL SHEET T18

PRODUCTION SPECIFICATIONS:

- BILKA T18 corrugated sheet metal is manufactured with a nominal thickness between 0.4 – 0.7 mm, based on the construction requirements, the standard length of the modules ranges from 0.500 m and 13.5 m. Execution of modules with different lengths from the standard ones will be made after prior consultation with BILKA specialist.
- Corrugated sheet metal is profiled in two options: with folds outward for facade and folds inward for the roofs.
- wide range of colors
- **T18 P** for facade;
- **T18 A** for the roof.

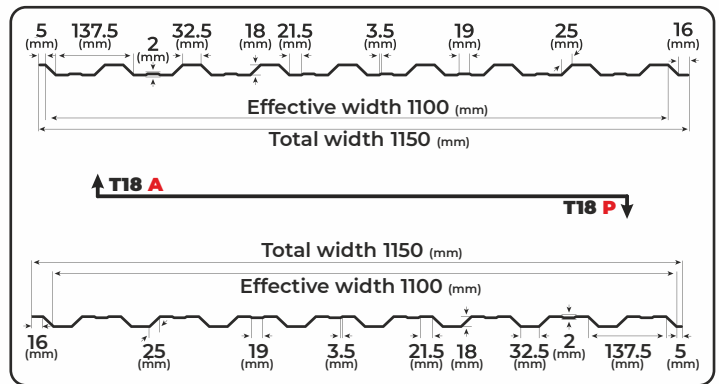

| | | |
|----------------------------------|----------------------------------|---|
| TECHNICAL CHARACTERISTICS | Material | Steel, galvanized sheet metal on both sides protected with polyester |
| | Standard thickness | 0,4 mm - 0,7 mm |
| | Total width | 1150 mm |
| | Usable width | 1100 mm |
| | Total height | 18 mm |
| | Weight on the surface | 2 - 7 kg / mp |
| | Minimum slope | 8° if no diagonal joints are necessary / 14° in the case of diagonal joints |
| | Glossy finish warranty | 10-year warranty for colour characteristics and corrosion |
| | Matte finish warranty | 15-year warranty for colour characteristics and corrosion |
| | Wood finish warranty | 15-year warranty for colour characteristics and corrosion |
| | GrandeMat finish warranty | 30-year warranty for colour characteristics and corrosion |
| | Estimated life cycle | 60 years for the roof, withstands temperature fluctuations |