

CORRUGATED STEEL SHEET T45


T45 BILKA corrugated sheet metal is manufactured in steel sheet, galvanized on both sides and protected with polyester.

It is used for small inclination roofs and intermediate floors.

It is the ideal and economical solution for construction and rehabilitation of facilities intended for warehouses, shopping centers, production facilities, farms, silos, stables, sports centers, etc.

PRODUCTION SPECIFICATIONS:

- BILKA T45 corrugated sheet metal is made with a nominal thickness between 0.4 – 1 mm, based on the construction requirements
- The standard length of the modules ranges from 0.500 m and 13.5 m. Execution of the modules with different lengths from the standard ones will be made after prior consultation with the technical specialist BILKA.
- wide range of colors
- **T45 P** for facade;
- **T45 A** for the roof.

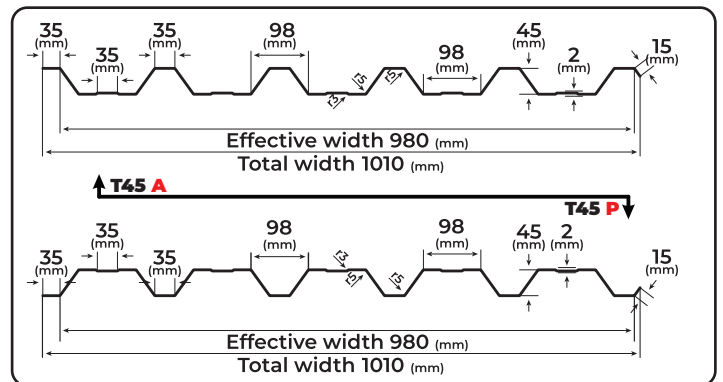

TECHNICAL CHARACTERISTICS	Material	Steel, galvanized sheet metal on both sides protected with polyester
	Standard thickness	0,4 mm - 1 mm
	Total width	1010 mm
	Usable width	980 mm
	Total height	45 mm
	Weight on the surface	3 - 12,5 kg / mp
	Minimum slope	8° if no diagonal joints are necessary / 14° in the case of diagonal joints
	Glossy finish warranty	10-year warranty for colour characteristics and corrosion
	Matte finish warranty	15-year warranty for colour characteristics and corrosion
	Wood finish warranty	15-year warranty for colour characteristics and corrosion
GrandeMat finish warranty	30-year warranty for colour characteristics and corrosion	
Estimated life cycle	60 years for the roof, withstands temperature fluctuations	