


CORRUGATED STEEL SHEET T60

The corrugated steel sheet T60 is especially used in constructions of industrial used (warehouses, industrial, commercial constructions, etc).

It is used as a support for terrace roofs inclined up to 5°, in combination with insulation and final roofing products. The corrugated metal sheet T60 is used by builders and for the intermediate floors in multi-level buildings.

PRODUCTION SPECIFICATIONS:

- BILKA T60 corrugated steel sheet is made with a nominal thickness between 0.5 – 2.5 mm, based on the construction requirements
- The standard length of the modules ranges from 0.500 m to 13.5 m. Execution of modules with different lengths from the standard ones will be made after prior consultation with BILKA specialist.
- Available in 25 color, mat and glossy options

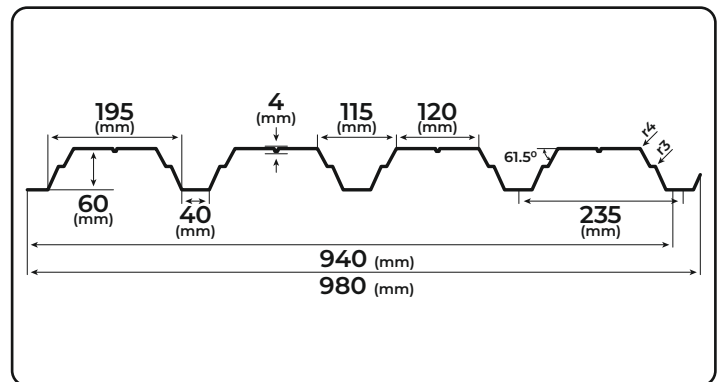

TECHNICAL CHARACTERISTICS	Material	Steel, galvanized sheet metal on both sides protected with polyester
	Standard thickness	0,5 mm - 2,5 mm
	Total width	980 mm
	Usable width	940 ±5 mm
	Total height	60 mm
	Weight on the surface	7,64 - 12,5 kg / mp
	Glossy finish warranty	10-year warranty for colour characteristics and corrosion
	Matte finish warranty	15-year warranty for colour characteristics and corrosion
	GrandeMat finish warranty	30-year warranty for colour characteristics and corrosion
Estimated life cycle	60 years for the roof, withstands temperature fluctuations	